

Specifications

General	
Frequency Range	VHF:136-174MHz/UHF:350-390MHz/400-470MHz/450-520MHz
Channel Capacity	160
Zones	50
Channel Spacing	12.5KHz
Working Voltage	DC 13.8V(±15%)
Frequency Stability	±1.5ppm
Antenna Impedance	50Ω
Dimensions	156*158*47mm (L/W/H)
Weight	1.29Kg
Transmitter	
Power Output	VHF/UHF H:30W VHF/UHF L:10W
4FSK Modulation	12.5KHz (data only): 7K60FXD 12.5KkHz (data and voice): 7K60FXE
FM Modulation	12.5 KHz: 8K50F3E
Modulation Limitation	+/- 2.5KHz @ 12.5KHz
FM Noise	-40dB
Spurious Emission	-36 dBm≤1GHz/-30 dBm≥1GHz
Adjacent Channel Power	≤-60dB
Frequency Response	+1/-3 dB
Audio Distortion	<3%
Vocoder	AMBE+2™
Receiver	
Digital Sensitivity	5% BER: 0.25 uV
Analog Sensitivity	0.25 uV (12 dB SINAD)
Intermodulation	60dB
Adjacent Channel Selectivity	60 dB
Spurious Response Rejection	70 dB
FM Noise	-40dB
Frequency Response	+1/-3 dB
Audio Power	3W
Audio Distortion	3%(typical)
Conduction Radiation	-57dBm
GPS Precision	Horizontal Accuracy≤-10m (in good condition)
TTFF (first location)Cold Boot	< 1 minute (good signal)
TTFF (first location)Hot Boot	< 10 seconds (good signal)
Environmental Specifications	
Working Temperature	-20°C~+70°C
Storage Temperature	-40°C~+80°C

BelFone reserves the right to update or change the above specifications without any prior notice. For more information please visit www.belfone.com.

BelFone
Communications for Efficiency and Safety

Fujian BelFone Communications Technology Co., Ltd.
Add: A15, Huaqiao Economic Development Zone, Shuangyang,
Luojiang, Quanzhou, Fujian, China 36200
Tel: +86 595 28396717
Fax: +86 595 22771635
Email: overseas@belfone.com
Website: www.belfone.com



To order in your local place, please contact:



BF-TM8250 DMR Mobile Radio

BF-TM8250 comes with a large size color display which delivers good visibility even under strong light environments. Also, the five programmable buttons allow the user to access any features he needs and thus greatly facilitate radio communications. Besides a full set of digital features, the integrated remote kill/stun/revive features bring unprecedented efficiency to teamwork and radio management.

Digital/analog Dual Modes
ETSI DMR Tier I And Tier II
Power-on Password
Built-in GPS Positioning
IP54 Protection



www.belfone.com



BelFone

BF-TM8250

Commercial DMR Radios



Highlights

Transmit Interrupt

This function enables a supervisor to interrupt a radio conversation in order to clear a channel for more important communications.

Radio Priority-Based Interruption

This function enables a radio with higher level to interrupt communications between radios with lower levels, giving higher priority to radios with higher levels. This means better dispatching efficiency.

GPS

BF-TM8250 can send location information to the command center and the commander can view GPS information in realtime, which increases commanding efficiency and personnel safety.

TTS (Text-to-Sound)

The integrated TTS function will automatically transfer all the text messages into voice, so that the user does not need to read and can therefore better focus his eyes and attention on the mission.

Remote Kill/Revive

Such functions greatly facilitate dispatching work and can be especially useful if you want to kill a lost radio.

Secure Communications

Use digital encryption to code and decode all voice calls, and support both dynamic and static encryption for secure communications.

SMS

BF-TM8250 supports messages with up to 140 characters when discreet communications are needed.

Features

Main Features

- Digital/analog Dual Modes
- TTS
- Scan/Monitor
- IP54 Protection
- High/Low Power Switchable
- Secure Communications




Digital Features

- Private Call
- Group Call
- All Call
- Radio Check
- Remote Kill/Revive
- Remote Monitor
- Emergency Alarm
- Digital Encryption
- SMS
- Roaming


Analog Features

- CTCSS/DCS
- Squelch Levels
- Busy Channel Lockout
- Narrow/Wide Band

DMO True 2-Slot

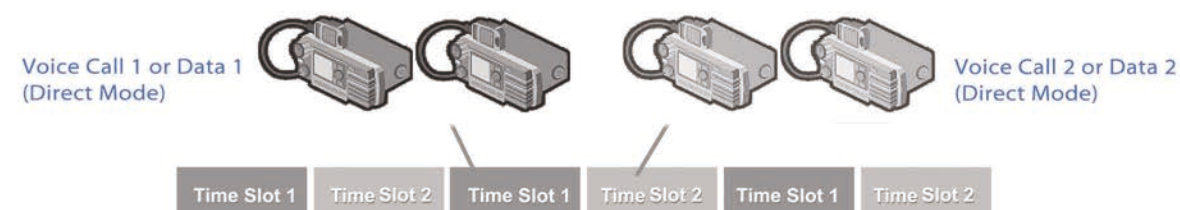

Standard Accessories

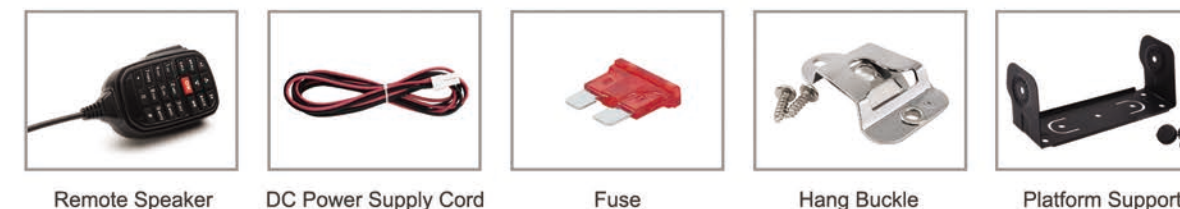

Optional Accessories

